

Handi VersaTool®
Designed by Suzanne Michelle Hyland



Appliqué outline

Appliqué outline

There are two small half circle cutouts on the right side of the VersaTool. Nestle your hopping foot into one of the cutouts to help direct and steady the hopping foot. By applying light pressure on the VersaTool with one hand, you can maneuver the tool to gently push the hopping foot in the direction desired. Be sure to keep one hand on the handle bar of the machine.


Tip: Look inside the hopping foot as you outline. You will see the needle as it hits the appliqué edge and see what direction to move next.

Stitch in the Ditch

Lines are printed on the VersaTool to assist with ditch quilting and straight line quilting.

The two guidelines printed in the center of the short edges of the straight line cutout are used for ditch quilting. Place these lines along the seam. The stitching should be in the ditch because these printed lines are 1/4" from the straight edge of the VersaTool.

Tip: No seam is perfectly straight. By applying gentle pressure to the VersaTool, minor adjustments can be made to keep the stitching perfectly in the ditch.

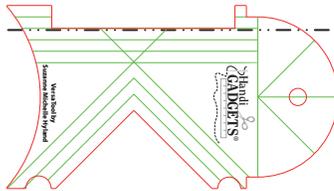


Stitch in the ditch

Straight Line Quilting

Use the straight edge for straight line quilting. The guidelines printed on the tool are to help space the quilting lines evenly.

To outline quilt 1/4" away from a straight seam, line up the outside edge of the VersaTool with the seam line.

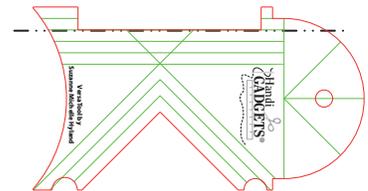

Stitching Inside Corners

The 90° cutout on the right side of the tool is used to stitch around corners. Guidelines are printed on the tool to help space quilting lines evenly. 45° lines are printed for diagonal lines.

Continuous Curve Quilting

The lower edge of the VersaTool can be used as an arch guide for continuous curve quilting.

Clamshells

The top of the VersaTool is cut for 3” half-circles. Use for clamshells, as an arch guide, or to make 3” circles.



Continuous Curve Quilting